



# KMR CONCHEM PVT. LTD.

ISO 9001 : 2015 CERTIFIED  
ISO 14001 : 2015 CERTIFIED



SOLUTION PROVIDERS FOR THE CONSTRUCTION INDUSTRY

## About Us

**KMR Conchem Pvt. Ltd.** is engaged in manufacturing of construction chemicals. Our highly specialized team is dedicated to provide world class products. We believe in customer centric approach and thus our efforts are aimed at providing quantity products and services.



## Vision

**KMR Conchem Pvt. Ltd.** wants to be a pioneer construction chemical manufacturer with world class products and solutions to be provided globally. Customer Satisfaction would remain the key goalpost of all our endeavors.



**KMR Conchem Pvt. Ltd.** was honored by **Shri Nitin Gadkari,**  
**Hon'ble Union Minister for Road Transport & Highways**  
in recognition of its valuable contributions to the infrastructure sector.





## SECTORS WE SERVE

**Highway Projects / Residentials / Airport Projects / Office Spaces  
Commercial Developments and Numerous other segments of  
infrastructure development in the country.**



## PRODUCT CATEGORIES

**Different Grades of Super-Plasticisers - Napthalane Base and PC Base),  
Water Proofing Compounds, Curing Compounds,  
Shuttering Oil (Mould Release Agent), Micro Silica**





# SERVICES

To provide value added services, excellent workmanship and utmost loyalty to our clients and associates. All our efforts are aimed at providing the quality services to the clients.

## **Construction Chemicals**

Manufacturing the entire range of post and Pre Construction related chemicals used at various stages of infrastructure development and serving various sectors such as Roads & Highway Projects, Ports, Housing & Real Estate, Commercial developments and many others.

## **Quality Management**

Design mix, checking all quality aspects of the cement, concrete like strength, slump, checking all raw materials on regular basis, Checking of Performance characteristics of Bituminous Mixes with Anti Strip Agents and maintaining the site - laboratories with our dedicated team of civil engineers and professionals.



# RESEARCH & DEVELOPMENT

The Key to our Success is our ability to generate innovative products & capabilities at the forefront of the industry. R&D is back bone of all KMR Conchem Products.

At KMR Conchem, we are shaping the future development of the existing products through a constant stream of innovations.

The state of the art manufacturing & testing facilities help us to deliver world class products to our customers at the most competitive pricing.

Innovation, Efficiency and Efficacy drive our operations at all levels of functioning.





# WHY CHOOSE US



- ◆ One of the most skilled and technically qualified management team of technocrats.
- ◆ One of the biggest construction chemical facilities ensuring timely delivery and lower inventory for contractors.
- ◆ One of the very few construction chemical companies to have their own transportation fleet ensuring flexibility and reliability in executing final orders.
- ◆ Well equipped in-house laboratory for checking and testing of all inputs and outputs to meet highest level of quality standards.
- ◆ ISO Certified 9001:2015 & ISO Certified 14001:2015 Company meeting all standard manufacturing and quality norms.
- ◆ Cent per cent, Output, Competitive rates for world class products, on-time delivery



# OUR VALUABLE CLIENTS




- ❖ TATA PROJECTS LTD.
- ❖ RKCPL
- ❖ KCPL
- ❖ M/S D.R.A. INFRACON PVT. LTD.
- ❖ SHIVALIYA CONSTRUCTION PVT. LTD.
- ❖ SP SINGLA CONSTRUCTION PVT. LTD.
- ❖ CHETAK ENTERPRISES LTD.
- ❖ REGAL ENTERPRISES
- ❖ PS CONSTRUCTION COMPANY
- ❖ A.M. INFRACON
- ❖ S.S. CHAUHAN CONST. PVT. LTD.
- ❖ S.S. INFRA
- ❖ GUPTA BUILDERS
- ❖ NEELKANTH RMC ROHTAK
- ❖ RAMA RMC, MURTHAL
- ❖ SKYDREAM RMC, ROHTAK
- ❖ ROYAL RESIDENCY, ZIRAKPUR
- ❖ SAHAJ INFRA
- ❖ BHARAT CONSTRUCTION COMPANY
- ❖ BALAJI RMC, ROHTAK
- ❖ BAJRANGBALI RMC, ROHTAK
- ❖ EMIRATE RESIDENCY, MOHALI
- ❖ MORBAGH RESIDENCY, ROHTAK
- ❖ RUDRA ENTERPRISES
- ❖ RDS INFRA
- ❖ KM BUILDCON
- ❖ RK INFRACON
- ❖ KMS BUILDCON PVT. LTD.
- ❖ SAR BUILDCON PVT. LTD
- ❖ CRP BUIDCON PVT. LTD.
- ❖ SHREE BALAJI BUILDWELL PVT. LTD.
- ❖ PSY INFRASTRUCTURE PVT. LTD.
- ❖ SUSHMA RESIDENCY, MOHALI
- ❖ ECO RESIDENCY, MOHALI
- ❖ JYANTI CONSTRUCTION COMPANY
- ❖ AND MANY MORE



# CERTIFICATION






# OUR CLIENT APPROVALS

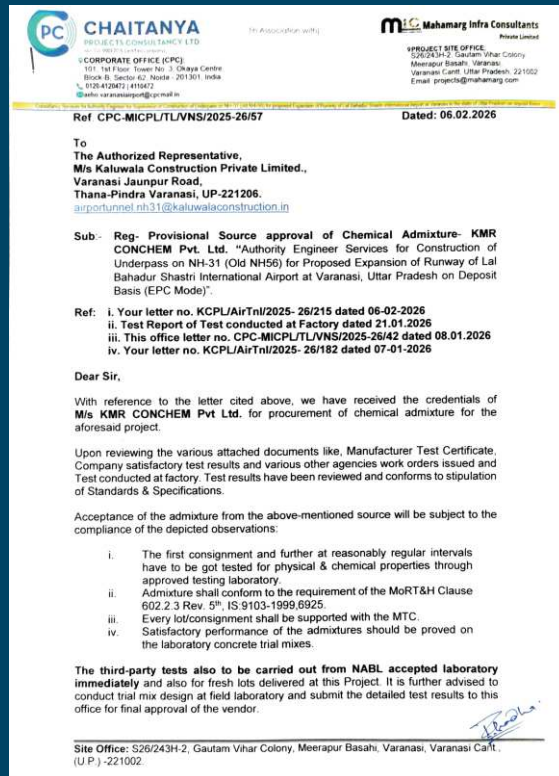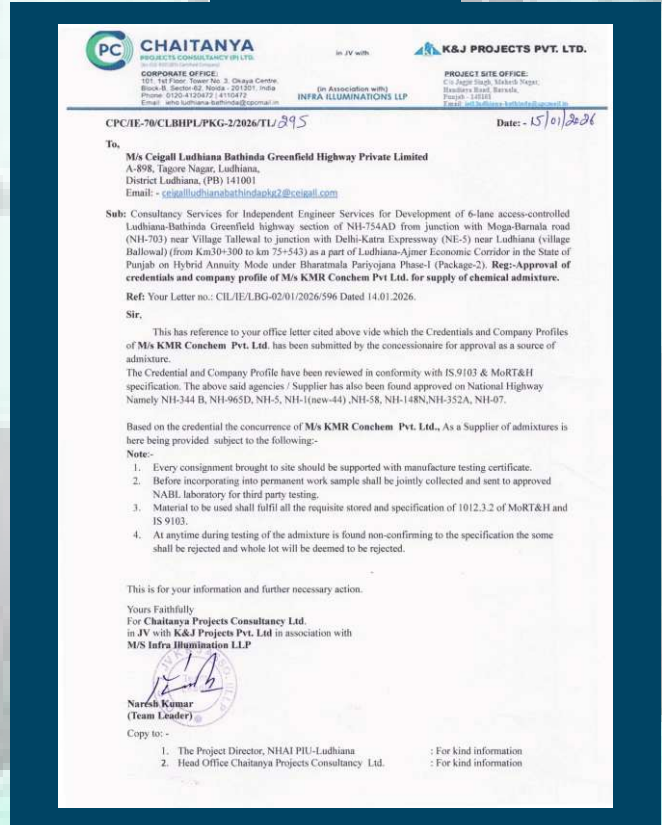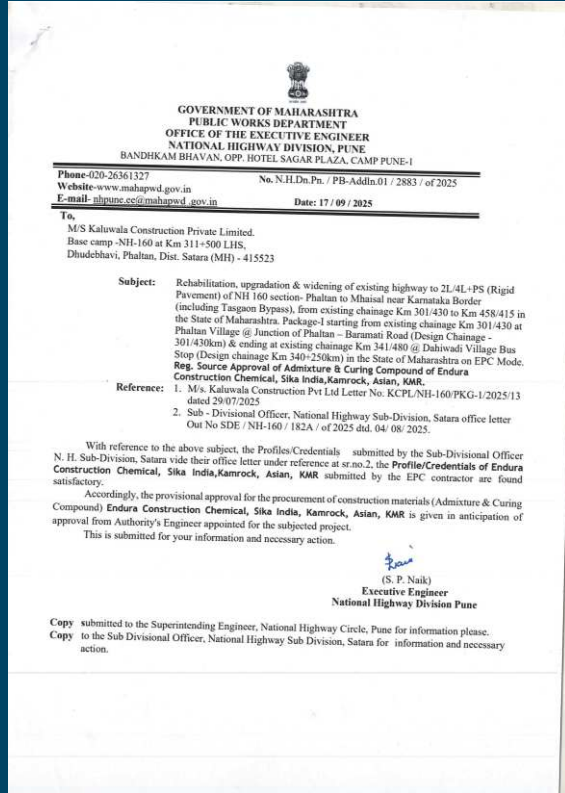



# OUR CLIENT APPROVALS

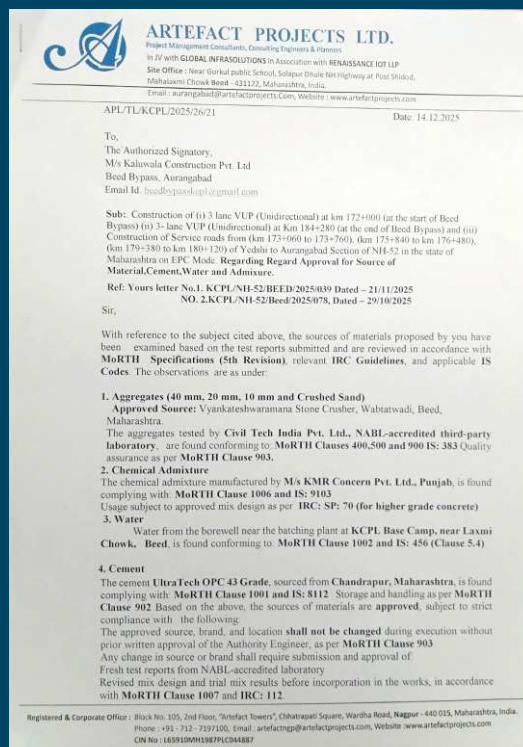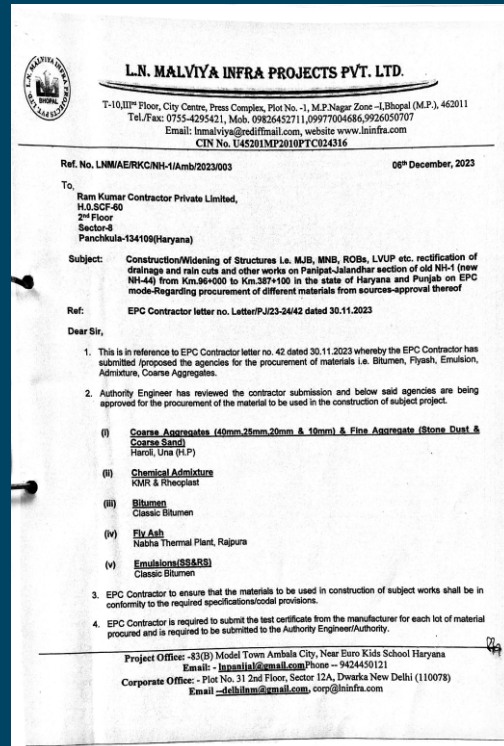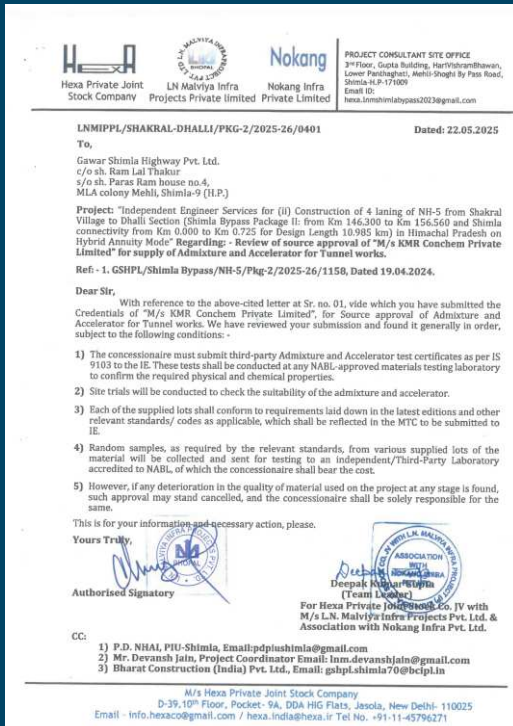

# OUR CLIENT PO

**TATA PROJECTS**  
Simplify.Create

| ORDER TYPE     | SBU & PROJECT NAME                               | ORDER NUMBER | ORDER DATE | AMENDMENT NUMBER | AMENDMENT DATE |
|----------------|--------------------------------------------------|--------------|------------|------------------|----------------|
| PURCHASE ORDER | TRANS & DIST (T&D) 76KV SC MAINPURI BARA TL EBRD | 550022073    | 03.09.2024 |                  |                |

**ANNEXURE 1: SCHEDULE OF QUANTITY, ITEM AND PRICE**

All Prices and Amounts in the below table are in (INR-Indian Rupee)

| Sl. | Item Code  | HSN / SAC Code | Tax Rate (%) | Item Description  | UOM | Quantity | Unit Price | Tax Amount | Amount |
|-----|------------|----------------|--------------|-------------------|-----|----------|------------|------------|--------|
| 10  | 2300140585 | 38244090       | 18.00        | Metacrete PCT 300 | KG  | 300.000  |            |            |        |

Total Contract Price Excluding Taxes: INR

Total Taxes: INR

Total Contract Price Including Taxes: INR

Amount in Words: (INR-Indian Rupee)

For TATA PROJECTS LIMITED,  
Authorized Signatory(ies)

**TATA PROJECTS LIMITED**  
One Boulevard 2nd 3rd & 4th Floor Lake Boulevard Street Powai Mumbai 400 076  
Tel : + 91 22 4242 2900, Fax : + 91 22 2570 0174  
e-mail: tpmumbai@tataprojects.com, www.tataprojects.com  
Registered Office: Mittuna Towers - 1 1-7-80 to 87 Prenderghat Road Secunderabad 500 003 Telangana, India

Page 3 of 7

**KALUWALA CONSTRUCTION PVT. LTD.**

**Purchase Order**

PO No: - KCP/WH-548/24-25/PO/ 302 Date: 20 October 2024

To:  
KMR Conchem Pvt Ltd  
Plot No. 1110, Sector-123, Khara, SAS Nagar (PB)-140301,  
Contact Number- 9478873061,  
E-mail: kmrindia@gmail.com  
GST NO-03AAJCK36721ZE

Ref: (I) Quotation No: KMR/24-25/0487 Dated: 02 September 2024

Dear Sir,  
As per our telephonic discussion held over phone and under reference (I) cited above a Service/Purchase order is being placed as under:-

| S.N. | Material                             | UOM | Quantity | Rate | GST Rate (%) | Disc (%) | Amount | SGST | CGST | IGST | Total Amount |
|------|--------------------------------------|-----|----------|------|--------------|----------|--------|------|------|------|--------------|
| 1    | Concrete Admixture Metacrete PCT-300 | Kg  | 20000    |      | 18           |          |        |      |      |      |              |

Total Rupees in words: \_\_\_\_\_

DELIVERY: At address near Kaushal Udyog (ITI), Chhindgaon Road Newwagaon Kalan-481226, Balaghat (MP). Contact Person - Sh. Karambir Singh- 8307378777 (Store Incharge) & Sh. Manoj Kumar - 980808005 (Material Engineer).

Remarks  
Admixtures conforming to IS-9103 and IS-6925 shall be accepted to improve workability of the concrete and/or extension of setting time, on satisfactory evidence that will not have any adverse effect on the properties of concrete with respect to strength, volume change, durability and have no deleterious effect on steel bars.

Kaluwala Construction Private Limited  
Auth. Sign.  
Site Camp at Km 27- Near Kaushal Udyog (ITI), Chhindgaon Road Newwagaon Kalan-481226, Balaghat,  
Site Camp at Km 10- Rengatola-481001, Balaghat (MP). Email- kcp.balaghat@kaluwalaconstruction.in  
Registration Number: 23AAHCK02720122

49, Vijay Nagar, Bhiwani  
M. 9053085101 (E-mail: kcp.bhiwani@gmail.com)

**Ram Kumar Contractor Private Limited**  
CIN: U45200HR2013PTC049491

Ref No.: RKC/NH-44/09 Date: 18.01.2024

To  
KMR CONCHEM Pvt Ltd,  
Plot No. 1110, Sector-123, Khara,  
SAS Nagar (PB)-140301  
GST No. 03AAJCK36721ZE

**Sub: PO of Metacrete PCT 250 (Admixture) for our project site**

Dear Sir,

With reference to your quotation. We are pleased to place the Purchase Order for supply of **Metacrete PCT 250 (Admixture)** as per details given below:-

| Sr. No. | Item/Specification | Qty.     | Unit | Rate/unit | Amount in Rs. |
|---------|--------------------|----------|------|-----------|---------------|
| 1.      | Metacrete PCT 250  | 5        | MT   |           |               |
|         | <b>Total</b>       | <b>5</b> |      |           |               |

**General Terms & Conditions:-**

- Rate: The above prices are FOR at site.
- Tax: The above prices are exclusive of GST.
- Billing Name: Ram Kumar Contractor Pvt. Ltd.
- Billing Address: Vidya Sagar Dental Clinic, First Floor, Club Road, Sangrur, 148001.
- Delivery Address: ROB at CH-230, NH-44, Near Mayur Simran Dhaba, Rajpura, 140401.
- Site Contact Person & Contact no.: Mr. Prince Goyal & 9034453773
- E-mail Id: pnjpal@rkcpl.in
- Order Validity: - 30 Days from PO date.
- Our GSTIN: 03AAGCR4421HIZQ
- Our PAN No:- AAGCR4421H

Thanking you

For Ram Kumar Contractor Pvt. Ltd.  
Authorized Signatory

H.O-SCF-60, 2nd Floor, Sector-8, Panchkula - 134109 (Haryana) @pnjpal@rkcpl.in

**DINESHCHANDRA R. AGRAWAL INFRACON PVT LTD**  
Engineers & Contractors

Address: Agrawal Complex, Opp Lions Hall, Deesa, Banaskantha, Gujarat, Deesa-385535, GUJARAT, India  
Ph. : 7930008789 Fax : 79-40022556 Email : drainfra89@gmail.com Website : www.draipcl.com

**PURCHASE ORDER**

To:  
KMR CONCHEM PVT. LTD.  
SUNNY ENCLAVE, PLOT NO 1110,  
SEC 123, C/O ANP BUILDCON, KHARAR,  
SAS NAGAR-140301  
GST NO. 03AAJCK36721ZE  
Party state : PUNJAB  
PAN No. AAJCK3672J

Order No.: DRA/JUN/2023/MS-151  
Order Date : 06/09/2023  
Indent No.: MS-23 (6-6-2023)  
Quotation No: By mail  
Quotation By : Mr. VINAY UPADHYAY  
PO Valid Date : 21/06/2023  
PO Subject : Purchase order for Admixture Kamcrete PCT 27  
PO For : Admixture Kamcrete PCT 27

Dear Sir,

With reference to our old Purchase Order DRA/MAR/2021/MS-248 DTD:- 04-03-2021 we are pleased to place an order on you as per below mentioned item and commercial terms and conditions.

| Sr. | Id No / Part No.     | Items             | HSN Code | Qty.         | Unit | Rate | Taxable Amt. | IGST |
|-----|----------------------|-------------------|----------|--------------|------|------|--------------|------|
| 1   | Admixtu re Kamcret e | CONCRETE ADMXTURE | 3824     | 2,000.00     | KGS  |      |              | 18%  |
|     | Desc. : CAMP-01      |                   |          |              |      |      |              |      |
| 2   | Admixtu re Kamcret e | CONCRETE ADMXTURE | 3824     | 8,000.00     | KGS  |      |              | 18%  |
|     | Desc. : CAMP-02      |                   |          |              |      |      |              |      |
|     |                      | <b>Total</b>      |          | <b>10000</b> |      |      |              |      |
|     |                      | <b>Total</b>      |          |              |      |      |              |      |
|     |                      | <b>GST Amount</b> |          |              |      |      |              |      |

**Terms & Conditions:**

- PRICE :** The above quoted rate FOR at site including Loading
- TAX :** GST included in calculated amount.
- DELIVERY ADD:**  
1- Dineshchandra R Agrawal Infracon Pvt Limited  
79T087, 140,141 Village SARORA  
Tehsil: BARAUT, Dist: BAGHPAT Uttar Pradesh  
Dist: BAGHPAT, UTTAR PRADESH-250622  
  
2- Dineshchandra R. Agrawal Infracon Pvt Ltd  
VILLAGE- PATNI PARTAPUR  
SHAMLI KARNAL ROAD

Prepared By  
SATENDRAKUMAR MAURYA

Checked By  
NARENDRA KAUSHIK

Approved By  
PUNEET GAUTAM  
(GENERAL MANAGER)



# TEST CERTIFICATES

**SHREE BALAJI TEST HOUSE**  
(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
(Building Material, Road Material & Soil, Survey, RTI Testing And Calibration Lab)  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (FBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 0129-2211344  
E-mail : sbthnag@rediffmail.com, Web : site-www.sbtpl.com

**SBTH**

**TEST RESULTS**

Test Certificate No: 25050046

Issue Date: 03.04.2025 Ref. No & Date: KMB/05028

Issued To: M/S KMR CONCRETE PVT. LTD. Date of Sample Receipt: 27.03.2025

Sample Particulars: Sample of Admixture Metacore RR Job Order No.: 25010046

NAME OF PROJECT: NIL

DATE OF TESTING: 27.03.2025 TO 03.04.2025

Testing Protocol: IS:9103 : 1999

| Sr.No. | PARAMETER                                    | OBSERVATION                    | SPECIFICATION (As per ASTM C309-81)      |
|--------|----------------------------------------------|--------------------------------|------------------------------------------|
| 01     | Appearance                                   | A greyish silver colour liquid | A greyish silver colour liquid           |
| 02     | Relative Density at 27° C                    | 0.839                          | 0.800 - Min                              |
| 03     | Curing Efficiency                            | 93.5%                          | 90%                                      |
| 04     | Water loss (Kg/M <sup>3</sup> )              | 0.46                           | Max 0.55 (Kg/M <sup>3</sup> ) in 72 hour |
| 05     | Drying Time                                  | 129 min                        | Max. 240 minutes                         |
| 06     | Reflectance Properties Dry Light Reflectance | 66                             | Min 60%                                  |
| 07     | New Volatile Content (% by Mass)             | 12.5                           | Max 15 %                                 |
| 08     | Flash Point                                  | 4° C                           | Min. 10°C                                |

\*\*\*End of the Report\*\*\*

**AUTHORISED SIGNATORY**

Note : 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our works is limited to invested amount.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with out the written approval of the laboratory.

BRANCH OFFICE : Lucknow, Bhopal, Pune & Vishakhapatnam, Mumbai, Jabalpur

OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, F.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT PANCHAYAT RAJ.

**SHREE BALAJI TEST HOUSE**  
(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
(Building Material, Road Material & Soil, Survey, RTI Testing And Calibration Lab)  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (FBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 0129-2211344  
E-mail : sbthnag@rediffmail.com, Web : site-www.sbtpl.com

**SBTH**

**TEST RESULTS**

Test Certificate No: 25050044

Issue Date: 03.04.2025 Ref. No & Date: KMB/05043

Issued To: M/S KMR CONCRETE PVT. LTD. Date of Sample Receipt: 27.03.2025

Sample Particulars: Sample of Admixture Metacore PCT 308 Job Order No.: 25010044

NAME OF PROJECT: NIL

DATE OF TESTING: 27.03.2025 TO 03.04.2025

Testing Protocol: IS:9103 : 1999

| Sr.No. | Properties                         | Results                     | Test Method  | Specified Limit as per IS 9103: 1999 (Reaffirmed 2018) with Amendment No 2 |
|--------|------------------------------------|-----------------------------|--------------|----------------------------------------------------------------------------|
| 01     | Appearance                         | Reddish Brown Colour Liquid | Visual       | -                                                                          |
| 02     | Relative Density                   | 1.106                       | IS 9103:1999 | 10.02 of Manf. Stated Value                                                |
| 03     | pH value                           | 6.88                        | IS 9103:1999 | Min. 6.00                                                                  |
| 04     | Dry Material Content (% by weight) | 39.10                       | IS 9103:1999 | + 5.0% of Manf. Stated Value                                               |
| 05     | Ash Content (% by weight)          | 2.92                        | IS 9103:1999 | + 5.0% of Manf. Stated value                                               |
| 06     | Chloride content (% by weight)     | NIL                         | IS 6925-73   | Within 10% of Manf. Stated value or 0.2% Max.                              |

\*\*\*End of the Report\*\*\*

**AUTHORISED SIGNATORY**

Note : 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our works is limited to invested amount.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with out the written approval of the laboratory.

BRANCH OFFICE : Lucknow, Bhopal, Pune & Vishakhapatnam, Mumbai, Jabalpur

OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, F.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT PANCHAYAT RAJ.

**SHREE BALAJI TEST HOUSE**  
(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
(Building Material, Road Material & Soil, Survey, RTI Testing And Calibration Lab)  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (FBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 0129-2211344  
E-mail : sbthnag@rediffmail.com, Web : site-www.sbtpl.com

**SBTH**

**TEST RESULTS**

9103 : 1999

Test Certificate No: 25050042

Issue Date: 03.04.2025 Ref. No & Date: KMB/05022

Issued To: M/S KMR CONCRETE PVT. LTD. Date of Sample Receipt: 27.03.2025

Sample Particulars: Sample of Admixture Metacore PCT 308 Job Order No.: 25010042

NAME OF PROJECT: NIL

DATE OF TESTING: 27.03.2025 TO 03.04.2025

Testing Protocol: IS:9103 : 1999

| Sr.No. | Properties                         | Results                     | Test Method  | Specified Limit as per IS 9103 : 1999 (Reaffirmed 2018) with Amendment No 2 |
|--------|------------------------------------|-----------------------------|--------------|-----------------------------------------------------------------------------|
| 01     | Appearance                         | Reddish Brown Colour Liquid | Visual       | -                                                                           |
| 02     | Relative Density                   | 1.889                       | IS 9103:1999 | 10.02 of Manf. Stated Value                                                 |
| 03     | pH value                           | 6.67                        | IS 9103:1999 | Min. 6.00                                                                   |
| 04     | Dry Material Content (% by weight) | 26.84                       | IS 9103:1999 | + 5.0% of Manf. Stated Value                                                |
| 05     | Ash Content (% by weight)          | 2.37                        | IS 9103:1999 | + 5.0% of Manf. Stated value                                                |
| 06     | Chloride content (% by weight)     | NIL                         | IS 6925-73   | Within 10% of Manf. Stated value or 0.2% Max.                               |

\*\*\*End of the Report\*\*\*

**AUTHORISED SIGNATORY**

Note : 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our works is limited to invested amount.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with out the written approval of the laboratory.

BRANCH OFFICE : Lucknow, Bhopal, Pune & Vishakhapatnam, Mumbai, Jabalpur

OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, F.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT PANCHAYAT RAJ.

**SHREE BALAJI TEST HOUSE**  
(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
(Building Material, Road Material & Soil, Survey, RTI Testing And Calibration Lab)  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (FBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 0129-2211344  
E-mail : sbthnag@rediffmail.com, Web : site-www.sbtpl.com

**SBTH**

**TEST RESULTS**

Test Certificate No: 25050048

Issue Date: 03.04.2025 Ref. No & Date: KMB/05038

Issued To: M/S KMR CONCRETE PVT. LTD. Date of Sample Receipt: 27.03.2025

Sample Particulars: Sample of Admixture Metacore PCT 308A+1 (shortcrete) Job Order No.: 25010048

NAME OF PROJECT: NIL

DATE OF TESTING: 27.03.2025 TO 03.04.2025

Testing Protocol: IS:9103 : 1999

| Sr.No. | Properties                                                                    | Results      | Test Method  | Specified Limits             |
|--------|-------------------------------------------------------------------------------|--------------|--------------|------------------------------|
| 01     | Relative Density                                                              | 1.423        | IS 9103:1999 | 10.02 of Manf. Stated Value  |
| 02     | pH value                                                                      | 2.65         | IS 9103:1999 | 3.0-4.0                      |
| 03     | Dry Material Content (% by weight)                                            | 55.32        | IS 9103:1999 | + 5.0% of Manf. Stated Value |
| 04     | Setting Time with Fresh Concrete (Dosage @ 7% by wt of the cement at 27±2 °C) |              |              |                              |
| a.     | Initial Setting                                                               | 2:16 Minutes | IS 9103:1999 | 4 Minutes Max                |
| b.     | Final Setting                                                                 | 7:32 Minutes | IS 9103:1999 | 12 minutes Max               |

\*\*\*End of the Report\*\*\*

**AUTHORISED SIGNATORY**

Note : 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our works is limited to invested amount.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with out the written approval of the laboratory.

BRANCH OFFICE : Lucknow, Bhopal, Pune & Vishakhapatnam, Mumbai, Jabalpur

OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, F.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT PANCHAYAT RAJ.

# TEST CERTIFICATES



## DELHI TEST HOUSE®

(A Unit of Delhi Test House Global LLP)  
A-62/3, G.T. Karnal Road, Industrial Area, Near Metro Pillar No. 800, Azadpur, Delhi-110 033 (INDIA)  
Ph. : +91-11-47075555 (COLLINE) E-mail : info@delhitesthouse.com  
Website : www.delhitesthouse.com

Report No.: GEN250428139  
Report Date: 06-Jun-2025  
ULR No.: TC14461200002238F

### TEST REPORT

| Report Issued To:                                                                                                                  | Sample Received On: | Analysis Duration                                           |
|------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------------------------------------|
| THE CHIEF EXECUTIVE OFFICER<br>NEW INDIA CONTRACTORS AND DEVELOPERS PVT LTD.<br>KPL (JV)<br>13/12 SECTOR 28-D, CHANDIGARH, Punjab. | 28-Apr-2025         | Start Date<br>29-Apr-2025<br>Completion Date<br>05-Jun-2025 |

| Sample Description:                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sample Name: ADMIXTURE                                                                                                                                                                                                                                                                        |
| Test Reference: IS 9103:1999                                                                                                                                                                                                                                                                  |
| Sample Quantity: 1 LTR                                                                                                                                                                                                                                                                        |
| Source/Make/Brand: KRM CHEMICALS                                                                                                                                                                                                                                                              |
| Customer Letter Ref. No.: KPL/2024-25/NH&I-TIG-DAM/                                                                                                                                                                                                                                           |
| Letter Dated: 25.04.2025                                                                                                                                                                                                                                                                      |
| Marks: CONSTRUCTION OF FOUR/5/LANE GREENFIELD CONNECTIVITY FROM TALWARA JATTA VILLAGE ON NH-44 TO GOBINDGAR VILLAGE ON DELTA AMRITSAR-KATIA EXPRESSWAY FROM KM 61.00 TO KM 12.545 (PANCHAYAT LINE ROAD) IN THE STATE OF PUNJAB ON EPC MODE UNDER NH (O), M/S KHANDAY INFRASTRUCTURE PVT. LTD. |

### Test Results:

| Sr.No.                                | Specific Test                                                | Units | Requirements                                                                       | Result | Test Method   |
|---------------------------------------|--------------------------------------------------------------|-------|------------------------------------------------------------------------------------|--------|---------------|
| <b>Discipline: CHEMICAL</b>           |                                                              |       |                                                                                    |        |               |
| <b>Main Group: BUILDING MATERIALS</b> |                                                              |       |                                                                                    |        |               |
| 1                                     | Dry Material Content (DMC), Cl. No. 9.0, Table-2             | %     | 0.95T-0.04C+1.00T                                                                  | 26.9   | IS 9103       |
| 2                                     | Ash Content (AC), Cl. No. 9.0, Table-2                       | %     | 0.95T-0.04C+1.00T                                                                  | 2.80   | IS 9103       |
| 3                                     | Relative Density (at 20±1°C), Cl. No. 9.0, Table-2           | -     | ±0.02<br>Manufacturer Stated Value                                                 | 1.09   | IS 9103       |
| 4                                     | Chloride Ion Content, Cl. No. 9.0, Table-2                   | %     | within 10% of the value or within 0.2% whichever is greater stated by manufacturer | +0.001 | IS 9103       |
| 5                                     | pH, Cl. No. 9.0, Table-2                                     | -     | 6.0 Min.                                                                           | 7.10   | IS 9103       |
| <b>Discipline: MECHANICAL</b>         |                                                              |       |                                                                                    |        |               |
| <b>Main Group: BUILDING MATERIALS</b> |                                                              |       |                                                                                    |        |               |
| 6                                     | Water content percent of control sample, Cl. 7.2.3, Table-1A | %     | 80 Max.                                                                            | 77.0   | IS 1199 (P-2) |

Reviewed By: Arit Singh  
Authorized By: Darun Kumar Mishra  
Authorized Signatory: Darun Kumar Mishra  
Page 1 Of 3  
BRANCH OFFICES ALL ACROSS INDIA  
QR-002



## SHREE BALAJI TEST HOUSE

(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
Building Material, Road Material & Soil, Survey, RTT Testing And Calibration Lab  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (PBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 9129-2211344  
E-mail : sbthbga@rediffmail.com, Web : site-www.sbtbpl.com



### TEST RESULTS

|                                                                                                |                                                                                     |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Test Certificate No: 25050045                                                                  | Ref. No & Date: KMR05243                                                            |
| Issue Date: 03.04.2025                                                                         | Date of Sample Receipt: 27.03.2025                                                  |
| Issued To: KANSAL CONCRETE PVT. LTD.<br>PLOT NO.110, SECTOR-123, KHARAK, SAS<br>NAGAR, PUNJAB. | Job Order No.: 25010045                                                             |
| Sample Particulars: Sample of Admixtures Metacore PCT 250.                                     | DATE OF TESTING:<br>27.03.2025 TO 03.04.2025<br>Testing Protocol:<br>IS:9103 : 1999 |
| NAME OF PROJECT: NIL                                                                           |                                                                                     |

| Sr.No. | Properties                         | Results                     | Test Method  | Specified Limit as per IS 9103 : 1999 (Reaffirmed 2019) with Amendment No 2 |
|--------|------------------------------------|-----------------------------|--------------|-----------------------------------------------------------------------------|
| 01     | Appearance                         | Reddish Brown Colour Liquid | Visual       | -                                                                           |
| 02     | Relative Density                   | 1.885                       | IS 9103-1999 | ±0.02 of Manf. Stated Value                                                 |
| 03     | pH value                           | 6.82                        | IS 9103-1999 | Min. 6.00                                                                   |
| 04     | Dry Material Content (% by weight) | 21.8                        | IS 9103-1999 | ± 5.0% of Manf. Stated Value                                                |
| 05     | Ash Content (% by weight)          | 2.31                        | IS 9103-1999 | ± 5.0% of Manf. Stated value                                                |
| 06     | Chloride content (% by weight)     | NIL                         | IS 6925-73   | Within 10% of Manf. Stated value or 0.2% Max.                               |

\*\*\*End of the Report\*\*\*

Note: 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our work is limited to technical aspect.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with our written approval of the laboratory.  
BRANCH OFFICE : Lucknow, Bhopal, Pune & Visakhapatnam, Mumbai, Jaipur  
OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, P.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT, PANCHAYAT RAJ.



## SHREE BALAJI TEST HOUSE

(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
Building Material, Road Material & Soil, Survey, RTT Testing And Calibration Lab  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (PBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 9129-2211344  
E-mail : sbthbga@rediffmail.com, Web : site-www.sbtbpl.com



### TEST RESULTS

|                                                                                                |                                                                                     |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Test Certificate No: 25050047                                                                  | Ref. No & Date: KMR05249                                                            |
| Issue Date: 03.04.2025                                                                         | Date of Sample Receipt: 27.03.2025                                                  |
| Issued To: KANSAL CONCRETE PVT. LTD.<br>PLOT NO.110, SECTOR-123, KHARAK, SAS<br>NAGAR, PUNJAB. | Job Order No.: 25010047                                                             |
| Sample Particulars: Sample of Admixtures Metacore W.B.                                         | DATE OF TESTING:<br>27.03.2025 TO 03.04.2025<br>Testing Protocol:<br>IS:9103 : 1999 |
| NAME OF PROJECT: NIL                                                                           |                                                                                     |

| Sr.No. | PARAMETER                        | OBSERVATION         | SPECIFICATION (As per ASTM C309-81)      |
|--------|----------------------------------|---------------------|------------------------------------------|
| 01     | Appearance                       | White Colour Liquid | White Colour Liquid                      |
| 02     | Relative Density at 27°C         | 0.856               | 0.800 - Min                              |
| 03     | Curing Efficiency                | 91%                 | 90%                                      |
| 04     | Water loss (Kg/M <sup>3</sup> )  | 0.49                | Max 0.55 (Kg/M <sup>3</sup> ) in 72 hour |
| 05     | Drying Time                      | 127 min             | Max. 240 minutes                         |
| 06     | Reflectance Properties Dry       | 62.5                | Min 60%                                  |
| 07     | New Volatile Content (% by Mass) | 11                  | Max 15 %                                 |
| 08     | Flash Point                      | 44°C                | Min. 10°C                                |

\*\*\*End of the Report\*\*\*

Note: 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our work is limited to technical aspect.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with our written approval of the laboratory.  
BRANCH OFFICE : Lucknow, Bhopal, Pune & Visakhapatnam, Mumbai, Jaipur  
OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, P.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT, PANCHAYAT RAJ.



## SHREE BALAJI TEST HOUSE

(GOVT APPROVED & ISO CERTIFIED TESTING & CALIBRATION LABORATORY)  
Building Material, Road Material & Soil, Survey, RTT Testing And Calibration Lab  
Add : FCA-560 B, EAST CHAWLA COLONY, BALLABGARH (PBD.)  
PHONE : 9212774833, 9219591810, 9219591813, 7065002947, 9129-2211344  
E-mail : sbthbga@rediffmail.com, Web : site-www.sbtbpl.com



### TEST RESULTS

|                                                                                                |                                                                                     |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Test Certificate No: 25050043                                                                  | Ref. No & Date: KMR05232                                                            |
| Issue Date: 03.04.2025                                                                         | Date of Sample Receipt: 27.03.2025                                                  |
| Issued To: KANSAL CONCRETE PVT. LTD.<br>PLOT NO.110, SECTOR-123, KHARAK, SAS<br>NAGAR, PUNJAB. | Job Order No.: 25010043                                                             |
| Sample Particulars: Sample of Admixtures Metaphast PCT-300 (PQS)                               | DATE OF TESTING:<br>27.03.2025 TO 03.04.2025<br>Testing Protocol:<br>IS:9103 : 1999 |
| NAME OF PROJECT: NIL                                                                           |                                                                                     |

| Sr.No. | Properties                         | Results                     | Test Method  | Specified Limit as per IS 9103 : 1999 (Reaffirmed 2019) with Amendment No 2 |
|--------|------------------------------------|-----------------------------|--------------|-----------------------------------------------------------------------------|
| 01     | Appearance                         | Reddish Brown Colour Liquid | Visual       | -                                                                           |
| 02     | Relative Density                   | 1.091                       | IS 9103-1999 | ±0.02 of Manf. Stated Value                                                 |
| 03     | pH value                           | 6.21                        | IS 9103-1999 | Min. 6.00                                                                   |
| 04     | Dry Material Content (% by weight) | 24.25                       | IS 9103-1999 | ± 5.0% of Manf. Stated Value                                                |
| 05     | Ash Content (% by weight)          | 2.12                        | IS 9103-1999 | ± 5.0% of Manf. Stated value                                                |
| 06     | Chloride content (% by weight)     | NIL                         | IS 6925-73   | Within 10% of Manf. Stated value or 0.2% Max.                               |

\*\*\*End of the Report\*\*\*

Note: 1. Balance Sample will be retained only for three month.  
2. The result listed refer only to the tested sample and applicable Parameters. Endorsement of product is neither inferred nor implied.  
3. Total liability of our work is limited to technical aspect.  
4. This report cannot used as an evidence in a court of law without the written approval of the lab.  
5. Certificate shall not be reproduced except in full with our written approval of the laboratory.  
BRANCH OFFICE : Lucknow, Bhopal, Pune & Visakhapatnam, Mumbai, Jaipur  
OUR CLIENTS : NHAI, RITES, POWERGRID CORPORATION, INDIAN RAILWAY, P.W.D., C.P.W.D., M.E.S., RELIANCE, IRRIGATION DEPARTMENT, PANCHAYAT RAJ.



*Our Portfolio comprises of a wide array of Products. The Same have been mentioned below:*

**Concrete  
Admixture**

**Accelerators &  
Shortcrete**

**Water Proofing  
Compounds**

**Curing Compounds**

**Shuttering Release Agents**

**Micro-Silica**

# OUR PRODUCTS



## ADMIXTURES

Chemical admixtures are used to modify and improve the properties of fresh and hardened concrete or mortar.

| Products | Description | Typical Users | Dosage/Coverage/Yield |
|----------|-------------|---------------|-----------------------|
|----------|-------------|---------------|-----------------------|

### ★ Water Reducing Admixtures (Plasticisers)

|                                                   |                                                                                                                    |                                                                                                                                                                    |                                                        |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| <b>METAPLAST P 100</b><br>1, 5, 20 and 200 litres | Water reducing admixtures. Conforms to IS:9103-1999 & Complies with ASTM C494 as Type A.                           | All structural and general concrete where improved density and quality are required. Cement saving where excess cement proves necessary to obtain target strength. | 0.5 - 1.5 liter / 100kg of total cementitious material |
| <b>METAPLAST P 200</b><br>1, 5, 20 and 200 litres | slump retaining and water reducing admixtures. Complies with BS 5075 part 1 and ASTM C 494 as Type D & IS:9103-99. | Cement saving can be made without reduction in strength and work ability. Used for all structural concrete where improved density and quality are required.        | 0.5 - 1.5 liter / 100kg of total cementitious material |

### ★ High Range Water Reducing Admixtures (Superplasticisers) -SNF Based

|                                                                           |                                                                                                                                                                                                          |                                                                                                                                                                                                       |                                                           |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| <b>METAPLAST SPT 200</b><br>1, 5, 20 and 200 litres<br>Also in 250 kg     | High Performing water reducing superplasticisers. Conforms to IS:9103-1999 also complies with IS 2645-2003, BS5075 part 3 and ASTM C-494 Type F.                                                         | To produce pumpable concrete for low water cement ratio concrete. Easy compaction in heavily reinforced concrete bridges, foundations columns, beams and narrow formwork units.                       | 0.5 to 2 percent by weight of total cementitious material |
| <b>METAPLAST SPT 300</b><br>1, 5, 20, 200 litres.<br>Also in 200 & 250 kg | High range superplasticising admixture. Complies with IS 9103. 1999 and BS 5075 Part 3, it also conforms to ASTM C-494 Type F and Type G depending on the dosage used.                                   | Speeds up construction, increases work ability and cohesion, aids pumping by reducing line friction and dry packing, low porosity resulting in sustain ability Improved water penetration resistance. | 0.5 to 2 percent by weight of total cementitious material |
| <b>METAPLAST SPT 300 (PQC)</b><br>200kg & bulk supply.                    | Superplasticising admixture for PQC concrete. Metaplast SPT 300 PQC complies with IS:9103:1999 and BS : 5075 part 3. Metaplast SPT 300 PQC conforms to ASTM-C-494 Type 'G' depending on the dosage used. | Best Suitable for PQC concrete by substantial reduction in water resulting in low permeability and high early strength.                                                                               | 0.5 to 2 percent by weight of total cementitious material |

### ★ Air Entraining Agents

|                                                              |                                                                                                 |                                                                                                                                                                                                                                                                                                      |                                                                    |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| <b>METAPLAST AEA</b><br>1,5, 20 and 200 litres & bulk supply | Air entraining admixture. Metaplast AEA complies with BS5075 Part 2, BS 4887 Part 1, ASTM C260. | To produce air entrained concrete for increased durability and resistance to damage by frost and deicing salts. Typical applications include concrete roads and concrete dams, airport, kerb concrete, runways and taxiways and other extensive areas of concrete exposed to potential frost damage. | 0.05 liters to 0.5 litres per 100kg of total cementitious material |
|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|



# OUR PRODUCTS



## Products

## Description

## Typical Users

## Dosage/Coverage/Yield

### ★ High Range Water Reducing Admixtures (Hyper Plasticisers) - PCE Based

#### METACRETE PCT 250

5,200 kg drums and bulk supply.

High performance PCE based admixture for wide range of concrete grades.

Metacrete PCT 250 is a high performance retarding superplasticiser intended for applications where retardation and long workability retention are required.

0.5 to 1.5 percent by weight of total cementitious material

#### METACRETE PCT 300

5, 200, 250 kg drums and bulk supply.

Advanced low viscosity retarding superplasticiser, based on polycarboxylic technology.

Metacrete PCT 300 is a high performance retarding superplasticiser intended for applications where retardation and long workability retention are required and it has been developed for use in : Mass reft foundation, Pumped concrete, Concrete requiring long workability retention, High Performance concrete.

0.5 to 1.5 percent by weight of total cementitious material

#### METACRETE PCT 350

5, 200, 250 kg drums and bulk supply.

Advanced low viscosity retarding superplasticiser, based on polycarboxylic technology. Metacrete PCT 350 complies with IS:9103-1999. It also complies with ASTM C494 Type G.

Metacrete PCT 350 is a high performance superplasticisers intended for applications where high water reduction and long workability retention are required, and it has been developed for use in. Self-compacting concrete, Pumped concrete, Concrete requiring long workability retention.

0.5 to 1.5 percent by weight of total cementitious material

#### METACRETE PCT 350 PQC

200 Kg, 250 Kg drums and bulk supply.

Advanced low viscosity high performance superplasticiser, based on polycarboxylic technology Metacrete PCT 350 PQC complies with IS:9103-1999. It also complies with ASTM C494 Type G.

Metacrete PCT 350 PQC is best suitable for PQC Concrete by substantial reduction in water resulting in low permeability and high early strength.

0.5 to 1.5 percent by weight of total cementitious material



# OUR PRODUCTS

## Products

## Description

## Typical Users

## Dosage/Coverage/Yield

### ★ ACCELERATORS & SHORTCRETE

#### METACRETE PCT 300 (A+)

5, 20, 200 litres & 200 kg

Accelerating admixture complies with IS: 9103-199, Bs5075 Part 1 and ASTM C494 Type C.

To accelerate the setting and early strength gain of portland cement concrete and mortar. Typical application includes precast concrete sections, concrete placed in cold weather conditions and concrete repairs etc.

cementitious material

### ★ SHUTTER RELEASE AGENTS

#### METAEASE SPL

5, 20, and 200 litre

Chemical mould release agent.

To Provide quick, clean and easy stripping of moulds and formwork and ensure high quality fair faced and stain free concrete.

Metaease SPL 20-60<sup>ml</sup>/ litre depending on porosity & texture of mould surface.

### ★ WATER PROOFING COMPOUNDS

#### METABOND SBR

1,5 & 20 litres

Styrene Butadiene polymer bonding agent cum cement mortar/concrete modifier

Used to modify the concrete for repairing distressed RCC members and to modify mortars as water proofing and flooring render

200 - 300 ml/50Kg Cement

#### METABOND SBR LATEX

1, 5 & 20 litres

Mortar and Screed modifier cum bonding aid

For modifying and improving bonding of floor toppings, renderings and mortars: repair of worm, damaged and spalled concrete, repair of large cracks: polymer modified floor screeds: waterproof plasters for masonry and slurries.

200 - 250 ml/50Kg Cement

### ★ CURING COMPOUNDS

## Products

## Description

## Typical Users

## Dosage/Coverage/Yield

#### METACURE WB

5, 20 and 200 litres

Low viscosity wax emulsion, wax based concrete curing compound. Complies to ASTM C309-90.

For spraying on freshly cast concrete, or newly exposed concrete surfaces after removal of form work, to form a temporary membrane which will retain sufficient moisture for effective curing to take place.

4 - 5.5 m<sup>2</sup> / Liter

#### METACURE RB

20 and 200 litres

High efficiency polymeric resin based film forming curing agent. Metacure RB gives 90% or greater curing efficiency when tested as per BS 7542-1992.

As a spray applied membrane to retain moisture in concrete for effective curing. Suitable for all general concrete application and of particular benefit for large area concrete surfaces, such as airport runways, PQC roads and bridge works.

4 - 5.5 m<sup>2</sup> / Liter



# PRODUCTS DESCRIPTION



## METACRETE PCT 250

**Super Plasticizer Cum Water Reducer**

### ADVANTAGES

- Imparts extreme fluidity
- Allows water reduction (20-30%)
- Higher early & ultimate strength
- Rapid placing with no vibration.
- Improved surface Finish, cohesion.
- Improved Surface Finish, cohesion.
- Reduced shrinkage & cracks.
- Chloride Free.
- Produce denser more durable concrete

### PRODUCT

METACRETE PCT 250 high range water reducing super plasticizer for concrete, mortars provide very high water reduction, complying to ASTM C-494 type-G BS 5075 part 3 IS 9103 1999

### COMPOSITION

METACRETE PCT 250 is a light yellow liquid based on super plasticising admixture based on modified polycarboxylate.

### PURPOSE

To impart very high work ability without the addition of extra water or to enable large water reduction to be made for higher early & ultimate Strength.



### DOSAGE

250 ml to 700ml / 50 kg Cement. Optimum dosage should be determined by site trials.

### PACKAGING

100, 250 Kg. Drums or Bulk delivery.

### DESCRIPTION

METACRETE PCT 250 is a powerful super plasticizer dispersing agent based on modified sulphonate naphthalene formaldehyde condensate.

### BENEFIT

1. Flowable concrete: METACRETE PCT 250 greatly produce flowing concrete with higher strength. In comparison of normal strength this Flowable concrete allows rapid placing of concrete with little or no vibration and makes the concrete denser for increased durability
2. High early strength: METACRETE PCT 250 gives high early strength if advantage of water reduction is taken upto 25% significant increase in ultimate strength improved surface finish, Improved water tightness no adverse shrinkage effect specially suitable for congested & heavily reinforce concrete.

### WHERE TO USE

- Precast & Prestressed concrete
- Floor slabs, girders
- Foundation
- Walls, columns, beams and ceiling
- Pump concrete, mass concrete
- Congested reinforcement concrete
- Low water / cement concrete
- Ready mixed concrete



#### TECHNICAL DATA

- Appearance : Liquid
- Colour : Brown
- Chloride Content : Nil
- pH Value : Min 6

#### METHOD OF USE

METACRETE PCT 250 is added to part mixing (Gauging) water. The dosage rate is 250ml-700ml / 50 kgs. cement bags. Optimum dosage should be determined by site trials.

#### OVERDOSING

Should be avoided since it may produce a concrete which may segregate and retard setting of concrete.

#### STORAGE LIFE

METACRETE PCT 250 has shelf life of one year in manufacturer's unopened containers protected from frost & direct sunlight.

#### HEALTH & SAFETY

METACRETE PCT 250 is an industrial chemical, ingestion should be avoided.

#### COMPATIBILITY

- METACRETE PCT 250 is compatible with all types of cement.e.g. OPC, PPC, PSC etc.
- METACRETE PCT 250 is compatible with all air entraining agent which complies with IS 9103-1999 and integral water proofing compound which complies with IS 2645-1978. If other admixture are to be used in concrete containing METACRETE PCT 250, they must be dispensed separately.



# METACRETE PCT 300 PQC



Super Plasticiser For Low W/C Ratio Concrete

## ADVANTAGES

METACRETE PCT 300 (PQC) produces cohesive Concrete for jobsite application especially meant for pavement quality concrete which needs initial moderate slump like 50+10mm and 30+15mm at the discharge point to feed the sleep form paver. The maximum retention period may be as long as 90 minutes commencing from the moment the water is added in the mix. Hence, retention period may vary according to the distance to be covered by the Tipper Truck. This can be simply achieved by adjusting the dosage of

Even with very less cementitious and fine content, lubrication is provided by the product to ensure smooth movement of the paving machine. At the same time unwanted event of edge collapse can also be eradicated through usage of this product.

## TECHNICAL DATA

- Appearance : Light yellow coloured liquid
- Specific Gravity : 1.07 - 1.1 g/cc
- PH value : Min 6
- Chloride Content : Nil
- Volumetric Mass @ 20°C: 1.09 kg/litre
- Alkali Content : Typically less than 1.5g Na<sub>2</sub>O equivalent/litre of admixture
- Air Entrainment : 1% additional Air

## PACKAGING

- 250 Kgs Barrels & bulk in 10 Kl tanker

## DESCRIPTION

METACRETE PCT 300(PQC) is a special water reducing plasticiser based on modified polycarboxylate it complies as per specification IS 9103-1999 ASTM C-494-1986 type G

METACRETE PCT 300(PQC) is particularly recommended for job sites requiring very low plasticity. Concrete with homogenous and cohesive mix without any hint of Segregation, bleeding. Also to retain that low work ability



## METHOD OF USE / DOSAGE

Optimum Dosage can only be established after trials, taking into account the rheological characteristics and the required mechanical performances. Normal Dosage is generally in the range of 0.5-1.5% by weight of cementitious material for maximum dispersancy throughout the mix, METACRETE PCT 300 (PQC) should be added to the mixing water only. Should the product be added to the fresh concrete, into the mixing truck, it is necessary to mix at high speed, and then at low speed (with a minimum 3 minutes at each speed).

**Shelf Life :** If stored in unopened containers at normal ambient temperatures, a shelf-life of approximately 12 months could be expected.

## WHERE TO USE

- Low workability for Long time required.
- Low slump concrete
- Pavement Quality Concrete

**PRECAUTION :** Not to be Stored at high temperature long periods. Should be protected from frost. It is toxic and formulated from chemicals which present a fire or health hazards.



# METACRETE PCT 300

Super Plasticiser For Low W/C Ratio Concrete



## ADVANTAGES

- Flowable mix without bleeding and segregation.
- High water reduction-up to 30%
- High early strength
- Produces flowable concrete resulting in easy placing and eliminates honeycombing.
- Reduction in shrinkage cracks.
- Less permeable and hence more durable concrete.

## TECHNICAL DATA

- Appearance : Light Yellow Liquid
- Specific Gravity : 1.08 +/-0.02 at 25°C
- Chloride Content : Nil
- pH Value : Min 6

## PRODUCT

Metacrete PCT 300 is the new generation super plasticising admixture based on modified Polycarboxylate. It complies as per specification IS: 9103-1999 and ASTM-C-494-86, Type G, Metacrete PCT 300 is especially designed for concrete mixer, which helps in ultra high water reduction, excellent flow characteristics, etc.

## COMPOSITION

Metacrete PCT 300 is a light yellow liquid based on super plasticising admixture based on modified polycarboxylate.

## WHERE TO USE

- Precast Concrete
- High Volume fly ash concrete
- High performance concrete
- Reinforced concrete

## COMPATIBILITY

- Metacrete PCT 300 is compatible with all types of cement e.g. OPC, PPC, PSC etc.
- Metacrete PCT 300 is compatible with all air entraining agents that comply with IS 9103-1999

and integral water proofing compounds that comply with IS 2645-1978. If other admixture is to be used in concrete containing Metacrete PCT 200 they must be dispensed separately.

## PACKAGING

50, 100, 250 Kg. in plastic barrel

## DOSAGE/ METHOD OF USE

- Dosage range of Metacrete PCT 300 should be 250-700 ml to 50 kg bag of cement. Optimum dosage should be determined by doing site trial mixes. Dosage may go above maximum limited for high performance concrete and shall be determined by site trial mix.
- The correct quality of Metacrete PCT 300 should be measured with recommended dispenser and should be added to the concrete with remaining 30% mixing water and allow to mix it for at least 60 seconds.
- Metacrete PCT 300 should not be added in dry mixes under any circumstance.

## STORAGE

- Keep the liquid above freezing temperature.
- If the product has frozen, thaw it at room temperature (25°C) and until it completely reconstitute in the original form.
- Store under cover, protect from direct sunlight.
- Failure to comply with recommended storage condition might result in premature deterioration of the products and packaging.

## HANDLING PRECAUTION

Metacrete PCT 300 is a non-toxic and inflammable. When in contact with the skin, it should be washed with cold water.

# METACRETE PCT 350



Advanced low viscosity high performance Super plasticiser,  
based on Polycarboxylic technology

## ADVANTAGES

- Increased early and ultimate compressive strength.
- Water reduction over 35%.
- Better resistance to carbonation.
- Lower permeability.
- Better resistance to aggressive atmospheric conditions.
- Increased durability.

## TECHNICAL DATA

- Appearance : Light yellow coloured liquid
- Specific Gravity : 1.07 - 1.1 g/cc
- PH value : Min 6
- Chloride Content : Nil to IS:456
- Volumetric Mass @ 20°C: 1.09 kg/litre
- Alkali Content : Typically less than 1.5g Na<sub>2</sub>O equivalent/litre of admixture

## PRODUCT

Metacrete PCT 350 complies with IS:9103-1999 . It also complies with ASTM C494 Type F and G depending on the dosage used.

## DESCRIPTION

Metacrete PCT 350 is differentiated from conventional superplasticisers in that it is based on a unique carboxylic ether polymer with long lateral chains. This greatly improves cement dispersion. At the start of the mixing process an electrostatic dispersion occurs but the cement particle's capacity to separate and disperse. This mechanism considerably reduces the water demand in flowable concrete.

Metacrete PCT 350 combines the properties of water reduction and workability retention. It allows the production of high performance concrete and/or concrete with high workability.

## COMPATIBILITY

Can be used with all types of Portland cements like OPC, PPC and PSC except High Alumina Cements. Compatible with all PC based admixture.

## USES

Metacrete PCT 350 is a high performance super plasticiser intended for applications where increased early and ultimate compressive strengths are required, and it has been developed for use in:

- Self compacting concrete.
- Pumped concrete.
- Concrete requiring long workability retention.
- High performance Concrete.

## DOSAGE

The optimum dosage of Metacrete PCT 350 to meet specific requirements should always be determined by trials using the materials and conditions that will be experienced in use. The normal dosage range is between 0.5 to 1.5 Percent of cementitious material.

## PACKAGING

Metacrete PCT 350 is available in 50, 100 & 200 Kg drums.

## STORAGE

Metacrete PCT 350 has a minimum shelf life of 12 months provided the temperature is kept within the range of 2°C to 50°C. Should the temperature of the product fall outside this range then contact local KMR Conchem office for advice.





## PRECAUTIONS

### Health And Safety Instructions

Metacrete PCT 350 does not fall into the hazard classifications of current regulations. However, it should not be swallowed or allowed to come in contact with skin and eyes.

Suitable protective gloves and goggles should worn.

Splashes on the skin should be removed with water. In case of contact with eyes rinse immediately with plenty of water and seek medical advice. If swallowed seek medical attention immediately - do not induce vomiting. Metacrete PCT 350 is water based and non-flammable.

## CLEANING AND DISPOSAL

Spillages of Metacrete PCT 350 Should be absorbed onto sand, earth or vermiculite and transferred to suitable containers. Remnants should be hosed down with large quantities of water.

The disposal of excess or waste material should be carried out in accordance with local legislation under the guidance of the local waste regulatory authority.





# METACURE WB

WAX BASED CONCRETE CURING COMPOUND



## ADVANTAGES

- Give water repellent film.
- Allows continuous and gradual curing without constant attention.
- Reduces surface temperature and crack formation.
- Prevents early water evaporation from concrete.
- No risk of poor curing.
- Eliminates use of water curing, hessian or sand.
- Non-toxic, Non-Flammable.
- Economical and easy to use.
- Reflects more ultraviolet rays.
- Facilitates the production of uniform concrete of maximum strength and durability.

## PRODUCT

METACURE WB is wax based concrete curing compound for fresh concrete, screeds, floors, granolithic toppings and vertical surfaces.

## COMPOSITION

METACURE WB is a white liquid based on low viscosity wax emulsion and white pigments.

## PURPOSE

To protect concrete against excessive drying out by retaining the moisture and water in fresh concrete.  
To prevent permanent water loss from concrete.

## COVERAGE

METACURE WB has a coverage of 4 to 5.5m<sup>2</sup> /liter.

## PACKAGING

50, 100, 210 liters drums.

## DESCRIPTION

METACURE WB is a solution of special pigmented wax emulsion formulated for application to freshly-placed concrete. It dries to form impervious film on the surface. It ensures that the concrete keeps as moist as possible during the vital curing period.

Efficient curing is particularly important in exposed situations such as concrete roads and runways etc., where the surfaces are subject to the drying action of heat, direct sunlight or wind. Traditional curing methods using wet hessian, straw, sand or polythene sheeting are never completely efficient as it is not possible to exclude air entirely from the face of the concrete. These techniques waste time, labour and materials and in addition are difficult to apply to vertical surface.

METACURE WB curing compound membrane replaces these older methods, by virtue of its easy application, higher efficiency and saving in labour and material costs.

## WHERE TO USE

For efficient and positive curing of canal lining, roads, runways, external floors, bridges, column and beams, dams other types of concrete construction where water curing is difficult or unreliable.

## TECHNICAL DATA

Appearance : White Liquid

Specific Gravity : 0.95 to 1.0

Dry Film : Translucent

Application Temperature : Min 5°C.

## METHOD OF USE

METACURE WB should be applied at the rate of 1 litre to 5.5m<sup>2</sup> of surface area, a single spray-applied coat is sufficient. For horizontal surfaces spray on METACURE WB as soon as any excess water has dried off. This is usually within 30 minutes of finishing vertical surface should be wetted with water after stripping the shuttering and just prior to the application of METACURE WB

## STORAGE LIFE

METACURE WB has a shelf life of at least 12 months in unopened drums, protect from direct sunlight.

## HANDLING PRECAUTION

METACURE WB is water based non-hazardous, non-toxic. Avoid contact with skin and eyes.

# METACURE RB



## RESIN BASED CONCRETE CURING COMPOUND

### ADVANTAGES

- Highly efficient Curing
- Reduces supervision and labour cost.
- Curing efficiently more than 90%.
- Forms an elastic impervious film to retain maximum moisture cement during curing period.
- Allows gradual and continuous curing without constant attention.
- Simple one coat spray application.
- Reduces possibility of shrinkage, hairline cracking and crazing.
- Ready mixed and economical.

### PRODUCT

METACURE RB is highly effective curing compound for concrete.

### COMPOSITION

METACURE RB is aluminised coloured solution of selected resins.

### PURPOSE

To protect concrete against excessive drying out during curing. To achieve optimum strength and durability.

### PACKAGING

20, 50, 100, 210, ltrs HDPE Drums.

### EFFECTIVE CURING

METACURE RB allows continuous and gradual curing without constant attention thus reduced supervision and labour costs over conventional methods. It also facilitates the production of uniform concrete with increased resistance to abrasion.

### DESCRIPTION

METACURE RB is a solution of special resin, formulated for application to freshly-placed concrete. METACURE RB dries to form an elastic impervious film on the surface which ensures that the concrete remains as moist as possible during the vital curing period. The film gradually disintegrates on weathering.

Traditional curing methods using wet hessian, straw sand or polythene sheeting are never completely efficient as it is impossible to exclude air entirely from the face of the

concrete. These techniques waste time, labour and materials and in addition are difficult to apply to vertical surfaces. METACURE RB Curing Compound replaces these older methods by virtue of its ease of application, higher efficiency and saving labour and material costs.

### WHERE TO USE

For Efficient and positive curing of.

- Bridges, dams, airport, runways, reservoirs.
- Roads, external floors canal Linings.
- Retaining vast floorings and rendering highways.
- Roof decks and shell roofs.
- Pre stressed beams and piers.

### TECHNICAL DATA

Appearance : Liquid

Colour : Aluminised Silver

### METHOD OF USE

METACURE RB has been designed to spray application to the newly laid concrete. Once the surface water has disappeared a thin film of METACURE RB is then applied to the whole surface using a hand operated spray gun or brush.

### APPLICATION

Stir well before use. After application the area concerned must be protected from rain for at least 2-3 hours.

### STORAGE

METACURE RB has a storage life of minimum 12 months in unopened container in dry condition out of direct sunlight.

### HANDLING PRECAUTION

METACURE RB is inflammable and usual precautions against fire and prolonged breathing of solvent vapour should be avoided. Contact with the skin should be avoided.

### COVERAGE

METACURE RB has a coverage of 4 to 5.5 m<sup>2</sup>/liter.



# METACRETE PCT 300(A+)



## Chloride Free Accelerating, Water Reducing Admixture

### Product

Metacrete PCT 300(A+) is Chloride free Accelerating, Water reducing admixture complies with BS 5075 Part 1 and ASTM C494 Type C.

### Description

Metacrete PCT 300 (A+) is guaranteed completely free of all forms of chloride and is supplied as a light Brown colored liquid. The main active ingredient is an inorganic formate

### Uses

To accelerate the setting and early strength gain of Portland cement concrete and mortar mixes without the introduction of chloride. Acts as a plasticiser, so gives significant increases in both ultimate and early strengths. Typical applications include precast concrete, concrete placed in cold weather, concrete for repairs, mortars for brickwork.

### Advantages

- Chloride free, safe in prestressed and reinforced concrete
- Produces exceptionally high early strengths
- Plasticizing action gives increased workability and / or increased strengths
- Early setting improves frost resistance
- Suitable for bricklaying mortar mixes
- Particularly effective in concrete at low temperatures

### Technical Data

|                  |                                      |
|------------------|--------------------------------------|
| Appearance       | : Light Brownish                     |
| Specific gravity | : 1.080 - 1.110 at 27 <sup>0</sup> C |
| Freezing point   | : -16 <sup>0</sup> C                 |
| Chloride content | : Nil to BS 5075                     |
| Air entrainment  | : Less than 1%                       |

**Compatibility :** Can be used with all types of Portland cements. Not suitable for use with high alumina cement

**Acceleration :** The addition of Metacrete PCT 300 (A+) to Portland cement concrete mixes accelerates both the setting and rate of strength gain. The strength improvements are most significant during the first 18 hours.

**Long term effects :** Accelerated corrosion testing of steel in concrete has shown that Metacrete PCT 300 (A+) does not affect the protection of steel afforded by Cement against corrosion even at four times the normal dose level.

### Application instructions

**Dosage:** The recommended dosage range for standard Concrete and mortar mixes with all grades of Portland cement is between 0.5 to 1.5 percent of cementitious material

**Over dosage:** An overdose of double the recommended amount of Metacrete PCT 300(A+) will result in a slight increase in initial acceleration, but will not materially alter the ultimate strength or characteristics of the cured concrete or mortar.

**Mixing:** Metacrete PCT 300(A+) should be stirred before use. Metacrete PCT 300(A+) should be added direct into the mixer. Best results are obtained when added at the same time as the mixing water.

### Curing

Metacure WB, curing membrane or alternative Methods such as polythene, water spray or wet hessian should be used.

# METACRETE PCT 300(A+)



## Packaging

Metacrete PCT 300(A+) is supplied in 10, 20 & 200 Kgs drums.

## Storage

Minimum shelf life of 12 months in unopened containers under normal warehouse conditions. Provided the temperature should be kept within the range of 2°C To 50°C. The temperature of the product fall out-Side this range then contact local KMR CONCHEM PVT. LTD. Office for advice.

## Precautions

### Health and Safety instructions

Metacrete PCT 300(A+) is nontoxic. Do not ingest. If ingested, give an emetic of common salt in water and seek immediate medical attention. Prolonged contact with skin should be avoided. Any splashes should be washed well with water. The use of rubber gloves and safety glasses is recommended. Any splashes on eyes should be flushed immediately with plenty of clean water and medical treatment sought.

### Fire

Metacrete PCT 300(A+) is non flammable. But, should be stored away from combustible materials.

## Additional information

Technical data and guidance can be provided on a wide range of admixtures and concreting aids including plasticisers, retarders, air entraining agents, waterproofers, mould release agents, surface retarders, workability aids and repair materials.

Separate data sheets are available on those products.

## Technical support

KMR CONCHEM PVT.LTD. provides a technical Advisory service for on-site assistance and advice on mix design, admixture selection, evaluation trials and dispensing equipment.

Typical effect of Metacrete PCT 300(A+) on strength gain (M-30 Grade of Concrete)

| Curing Temperature | Dosage (1% of Cement) | Initial set (BS 5075) hrs. | Final set (BS 5075) hrs. | Compressive strength(N/mm <sup>2</sup> ) |       |       |       |       |        |
|--------------------|-----------------------|----------------------------|--------------------------|------------------------------------------|-------|-------|-------|-------|--------|
|                    |                       |                            |                          | 10hrs                                    | 18hrs | 24hrs | 3Days | 7Days | 28Days |
| 50°C               | NIL                   | 14                         | 19                       | -                                        | -     | 1.5   | 5.5   | 17    | 32     |
|                    | 1%                    | 12                         | 17                       | -                                        | 0.5   | 3.0   | 10    | 22    | 36     |
| 100°C              | NIL                   | 4                          | 06                       | -                                        | -     | 2.5   | 08    | 20    | 35     |
|                    | 1%                    | 3                          | 4 ½                      | -                                        | 2.0   | 4.5   | 13    | 26    | 40     |
| 200°C              | NIL                   | 3                          | 4                        | 1.0                                      | 4.5   | 6.0   | 17    | 29    | 43     |
|                    | 1%                    | 2                          | 3                        | 3.5                                      | 9.0   | 11.0  | 26    | 38    | 48     |



# **KMR CONCHEM PVT. LTD.**

**+91 80546-54111**  
**+91 70154-13837**  
**+91 98777-45208**

**ISO 9001:2015 CERTIFIED**  
**ISO 14001:2015 CERTIFIED**

E-mail: [kmrindia.in@gmail.com](mailto:kmrindia.in@gmail.com)  
Website: [www.kmrconchem.com](http://www.kmrconchem.com)

---

Address: Plot No. 1110, Sector 123, Sunny Enclave, Mohali, Punjab, India - 140301